嘉尼企業股份有限公司 CANAL ELECTRONIC CO.,LTD.





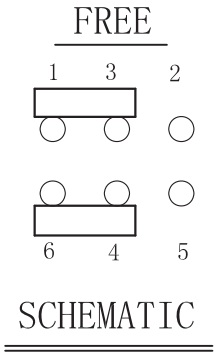



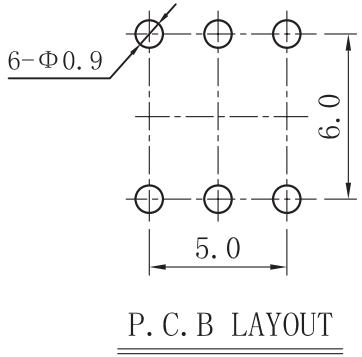

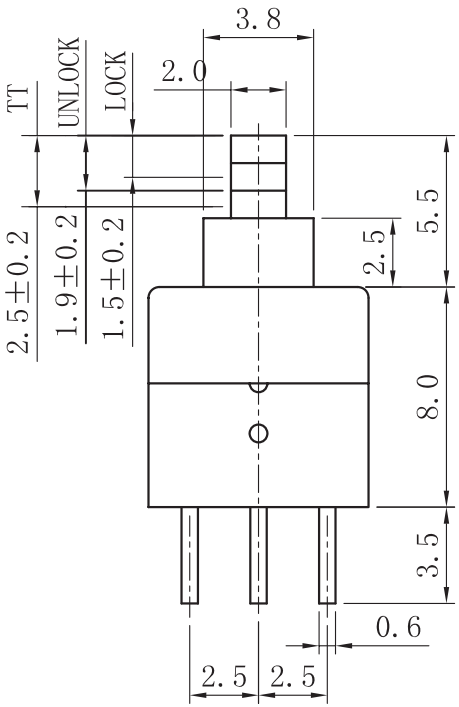

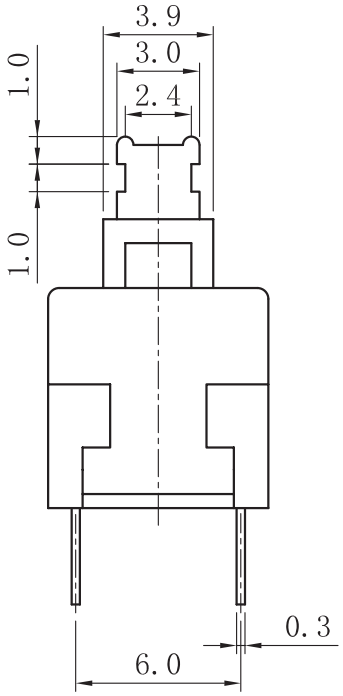

Rated Voltage	DC30V 0.1A
Withstand Voltage	AC250V 1 minute
Contact Resistance	≤ 50 mΩ
Operating Force	160 ± 80gf
Insulation Resistance	≥ 100 MΩ DC250V
Soldering Process	Hand Soldering
Mechanical Life	100,000 cycles
Electrical Life	10,000 cycles
Travel (PT)	1.5 ± 0.2 mm
Total Travel (TT)	2.5 ± 0.2 mm
Operating Temper	-25 ℃～+65℃
Ambient Humidity Used	＜ 85%RH

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.3(mm).

REVISION	DESCRIPION	REVISED BY	TOLEANCES .X .XX ANGLE ½°					UNIT mm	PART NAME	BS800 SPEC DRAWING	DWG NO
4			DRAWN BY	Alice	DESIGNED BY	Eric	SCALE				WS0705A
3											
2			CHECKED BY		APPROVED BY		DATE	2004.05.04	PART NO	BS800L	
1 2007.09.19	換新圖框,重新出圖	吳美玉									